

Tele-Tower[®]

Adjustable Work Platform

MODEL 1177 EXTENSION

OPERATOR'S MANUAL

! WARNING !

Read and follow these warnings and the instructions that follow. Failure to do so may result in serious property damage, serious bodily injury, and/or death:

BEFORE ATTEMPTING TO ASSEMBLE OR USE
the Tele-Tower[®] Adjustable Work Platform Extension 1177:

- 1) Thoroughly read and make sure you understand the Operator's Manual for the Tele-Tower[®] Model 1101 Adjustable Work Platform*
- 2) Thoroughly read this set of instructions, make sure you understand them, and only then follow the step-by-step directions.

FAILURE TO READ AND FOLLOW THESE INSTRUCTIONS
could result in an incorrectly assembled structure which may fail. Failure of the structure may result in serious property damage, serious bodily injury and/or death.

All photos in this manual are for illustrative purposes only. Users should always use appropriate safety devices and personal protective equipment when engaging in any activity around this equipment.

*All Tele-Tower[®] manuals are available free from Paragon Pro Manufacturing Solutions
Call Customer Service at 1-800-448-0822 or
701-775-0551 if you need a copy.

**7251 South 42nd St.
Grand Forks ND 58201**

www.paragonpromfg.com

1-800-448-0822

To our valued customer,

Thank you for choosing a **Telpro Inc.**® product by **PARAGON PRO** Manufacturing Solutions. We are pleased that we are able to provide equipment to make your work easier.

Our efforts are focused on producing the finest quality equipment of which we are capable. We make sure to spend extra time and effort on our design and production in order to reduce your time and effort spent using the product.

We take pride in providing the best for our customers. Quality, innovation, and excellence are all qualities this company ensures. No product is sent without being factory tested and inspected to ensure the highest quality for you.

It all began in 1972 when Roland Young designed our first product, the PANELLIFT® Brand Drywall Lift, and revolutionized the drywall industry. To this day we are continuously making advancements in manufacturing and design.

Thank you again for giving us the opportunity to work with you. Any questions or comments that you have are always welcome.


PARAGON PRO
M a n u f a c t u r i n g S o l u t i o n s

WARNING

Read and follow these warnings and the instructions that follow. Failure to do so may result in serious property damage, serious bodily injury, and/or death:

- Total weight capacity of the Tele-Tower® Adjustable work platform with the 1177 Extension installed is 550 lbs. (249 kg) **DO NOT EXCEED THIS LIMIT!**
- Inspect the work platform assembly before each use to see that:
 - it is assembled correctly
 - it is level and plumb
 - base outriggers are extended to maintain a height to base ratio in keeping with applicable standards
 - all four casters are securely installed and properly fastened
 - all guardrails, chains and sway braces are correctly and securely installed
 - safe access is provided
 - there are no overhead obstructions or electric lines within 12 feet of the scaffold assembly
- Always engage all four ladder lock pins before climbing.
- When using the 1177 Tele-Tower® Extension, stand only on the top platform. The lower platform is not designed as a work area.
- Do not exceed working heights by standing on guardrails, planking guardrails or by use of boxes or ladders or other devices on the work platform.
- Never make elevation adjustments with a person on the Tele-Tower®.
- Do not ride manually propelled rolling work platform. No personnel should be on the tower while it is being moved.
- Lock all casters before climbing onto the Tele-Tower®.
- Work only within the platform area: do not try to extend overhead work area by reaching out over guard railing.
- Do not extend the length or width of the work platform beyond the manufacturer's supplied design.
- Before moving the work platform:
 - Secure all materials
 - Be sure floor surface is clear of obstructions or holes
 - Be sure there are no overhead obstructions or electric power lines in the path of rolling work platform.
- Rolling towers must only be used on hard level surfaces.
- Move rolling towers by pushing at the base level only. Do not pull from the top.

Extension Components

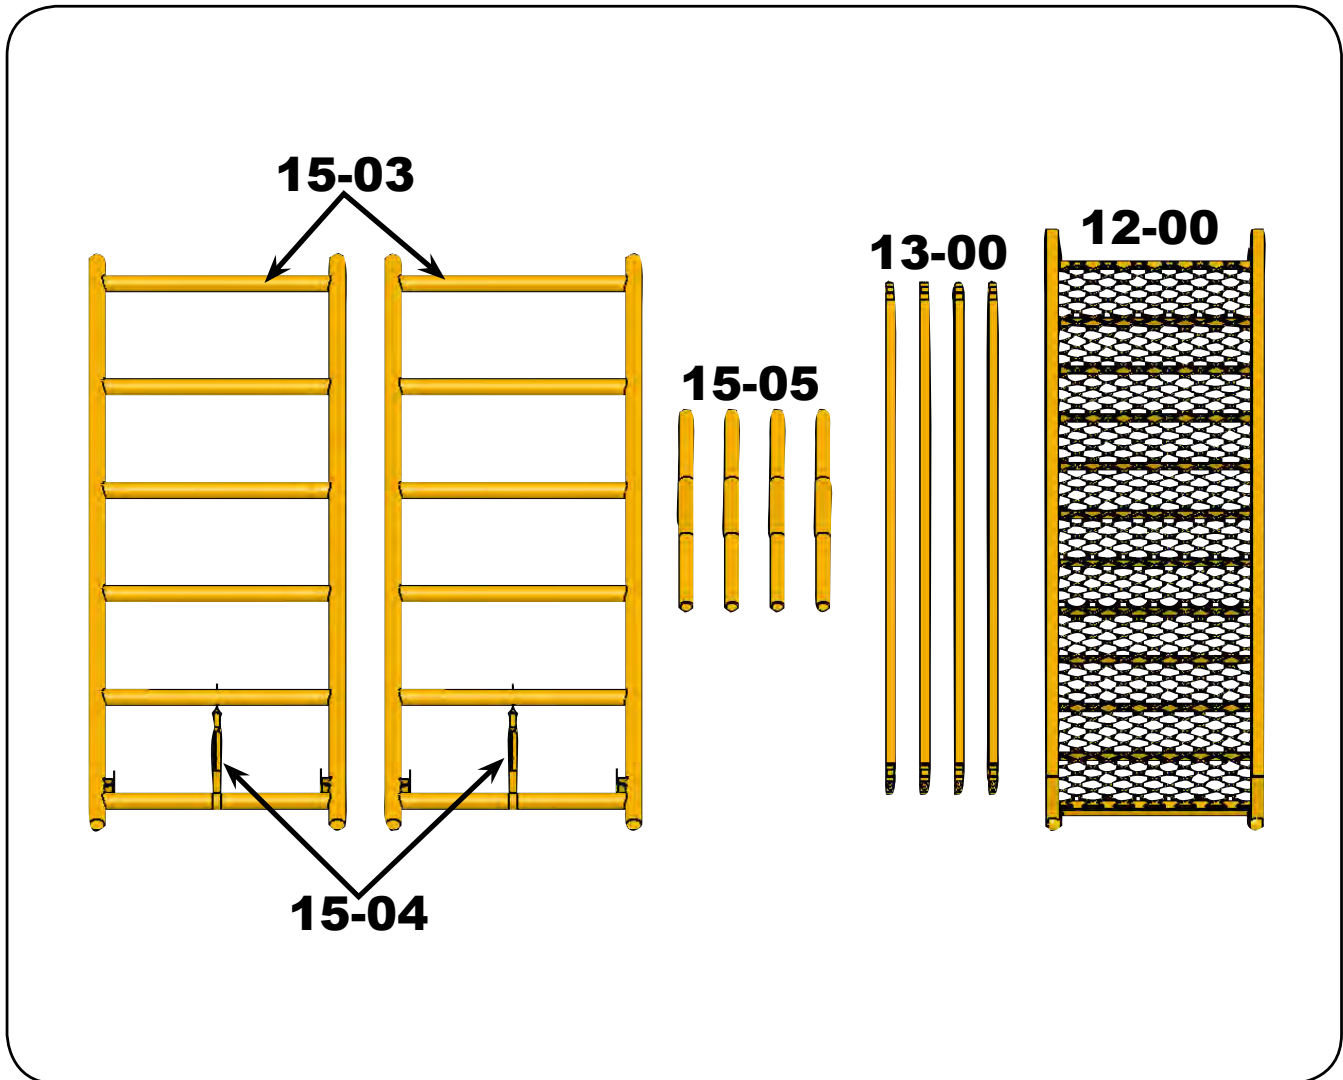

Parts Index

<u>Part #</u>	<u>Description</u>
15-03	Complete Extension Ladder (set of 2)
15-05	Extension Coupler Pipes (set of 4)
13-00	Braces (Set of 4)
12-00	Deck
15-04	Turn Buckle Fastening Assembly

Total weight of components is 98 lbs.

STEP 1

- Begin with assembled standard Tele-Tower®
- FULLY EXTEND THE BASE OUTRIGGERS AND SET CASTER BRAKES.
 - REPLACE THE SAFETY RAILS WITH THE EXTENSION COUPLER PIPES



STEP 3



Loosen the turnbuckles on the extension ladders and turn them down toward the deck.

STEP 4



Attach hook end to *inner* telescoping ladder – not outer ladder. **TIGHTEN SECURELY**

- NOTE: CHECK TO MAKE SURE THIS ASSEMBLY REMAINS SNUG DURING USE.

STEP 2



Place the extension ladders on the coupler pipes with the turnbuckle fastener on the bottom as shown.

STEP 5



Position deck on the **TOP RUNGS** of the extension ladders only. **NEVER** position the deck on any of the lower rungs as this will prevent proper installation of the anti-sway braces resulting in an unstable structure.

STEP 6



Attach the braces to the bottom of the extension deck.

STEP 8



Attach all four braces before using.

STEP 7



Attach the bottom of the braces at the bottom of the extension ladders.

WARNING!! Never operate the Tele-Tower® without first making sure all braces are properly and securely installed on the base unit as well as the extension. Failure to properly install all braces can result in collapse of the platform possibly resulting in serious property damage, and/or bodily injury and/or death.

STEP 9



Insert the safety rails in the top of the extension ladders.

STEP 10



Insert the second set of rails in the top of the first.

STEP 11



Raise deck to desired height by rotating winch handle in a clockwise direction.

WARNING!!


- ALWAYS LOCK DECK HEIGHT IN POSITION USING THE LADDER LOCK SPRING PINS. Failure to do so can result in sudden and unexpected collapse of the work platform possibly resulting in serious property damage and/or serious bodily injury and/or death.



Fully extended TELE-TOWER® with extension provides a safe 17.5' deck height. (24' working height)

This product contains trace amounts of the following items which are known to cause
These chemicals are not hazardous under product's intended use.
Please review CAS# for more information.

Chemical	Hazard	CAS#	% By Weight
Arsenic	Cancer	7440-38-2	Trace
Cadmium	Developmental	7440-43-9	Trace
Chromium	Cancer, Developmental	7440-47-3	Trace
Ethylbenzene	Cancer	100-41-4	Trace
Lead	Cancer	7439-92-1	Trace
Methanol	Developmental	67-56-1	Trace
Methylene Chloride (Dichloromethane)	Cancer	75-09-2	Trace
Nickel	Cancer	7440-02-0	Trace
Propylene glycol monobutyl ether	Cancer	5131-66-8	Trace
Toluene	Developmental	108-88-3	Trace
Wood Dust	Cancer	None	Trace

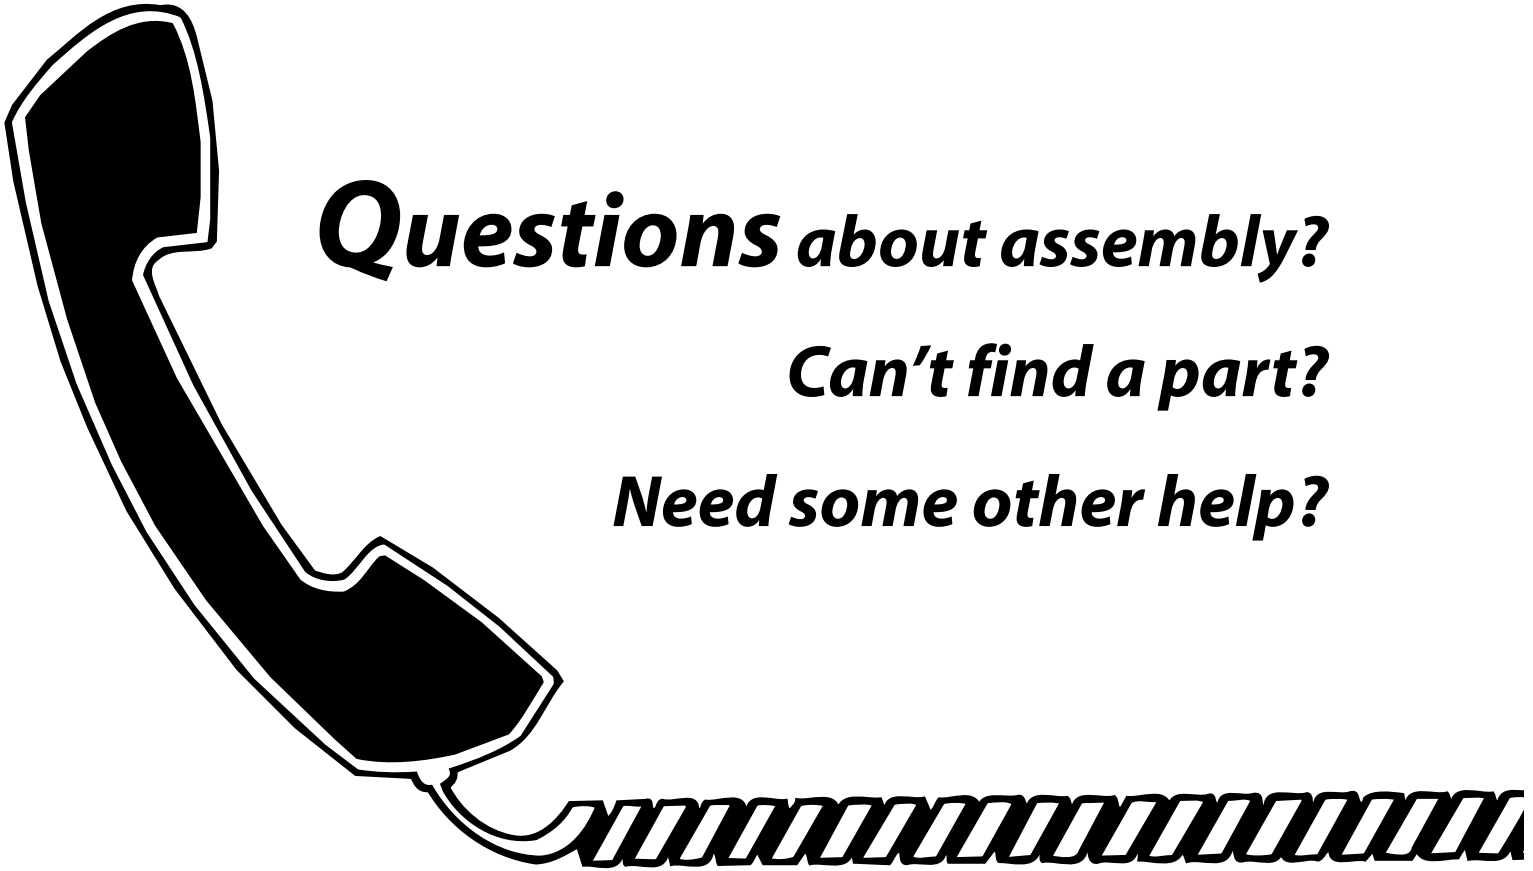

Questions about assembly?

Can't find a part?

Need some other help?

Call us:

1(800)441.0551

1(800)448.0822

Product Support is available.

www.paragonpromfg.com